

2.16 Installation of the roof

Caution:

d Follow the procedure a/o use appropriate means to avoid back – lumbar injuries when required by the load and installation site characteristics

d Safety devices must be used by the personnel whenever necessary to avoid the risk of accidental falling

watertight roof for outdoor installation




2.16.1 Watertight roof for outdoor installation

- position the roof on the top end of the uprights, mounting it on the final ring crossbeams. Pay attention to the correct positioning of the water draining side.
(see figure A_PE_002_15)

- insert the drop – stop profiles between the final crossbeams and the roof.
(see figure A_PE_002_15S)

- fix the 4 corners of the watertight roof to the 4 plates at the upper ends of the top uprights.
(see figure A_PE_002_15S)

- each side is fixed to the crossbeam with 1 M8x25 hexagonal head screw, 1 M8 grower and 1 8x24 washer.

 **Seal any cracks to avoid seepages into the framework.**
Sealant not included in the supply.

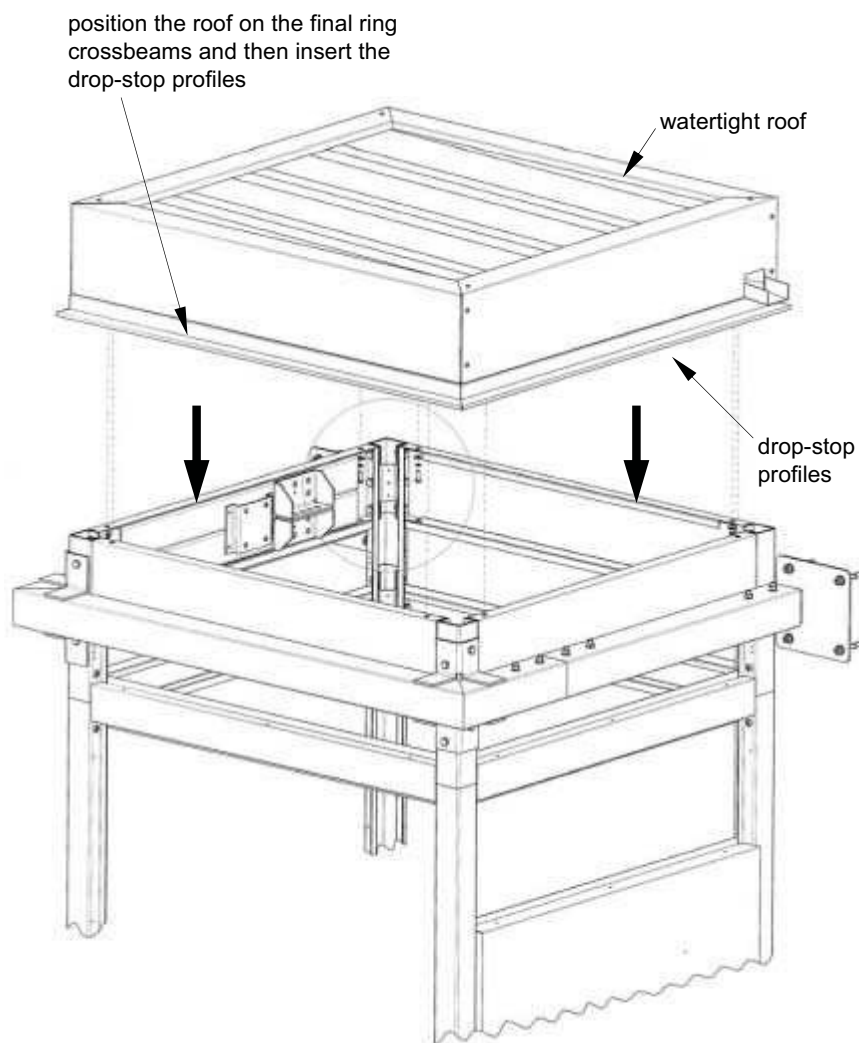


Fig. A_PE_002_15S